

I-Pack™

Automated Packaging Solution

Automated
Void
Reduction
System



Automated Void Reduction System

The I-Pack™ automated packaging system fully integrates and enhances your packaging line to get product out the door faster and more efficiently, leaving your customers completely satisfied.

INCREASE FULFILLMENT VELOCITY

- Fully-automated, integrated solution
- Industry-best throughput
- Right-size calculations executed in real-time

OPTIMISE CUBE SIZE


- Right-size package reduces freight cost
- The perfect material amount is used every time, eliminating waste
- Material can be sourced locally

IMPROVE CUSTOMER EXPERIENCE


- Product is secure, neat and easy-to-open
- Innovative packaging solution enhances brand image
- Custom print to convey brand image

REDUCE DAMAGE

- Patented package construction keeps items secure in transit
- Additional cushioning can be auto-inserted when you need it
- The fold increases box strength, adding protection

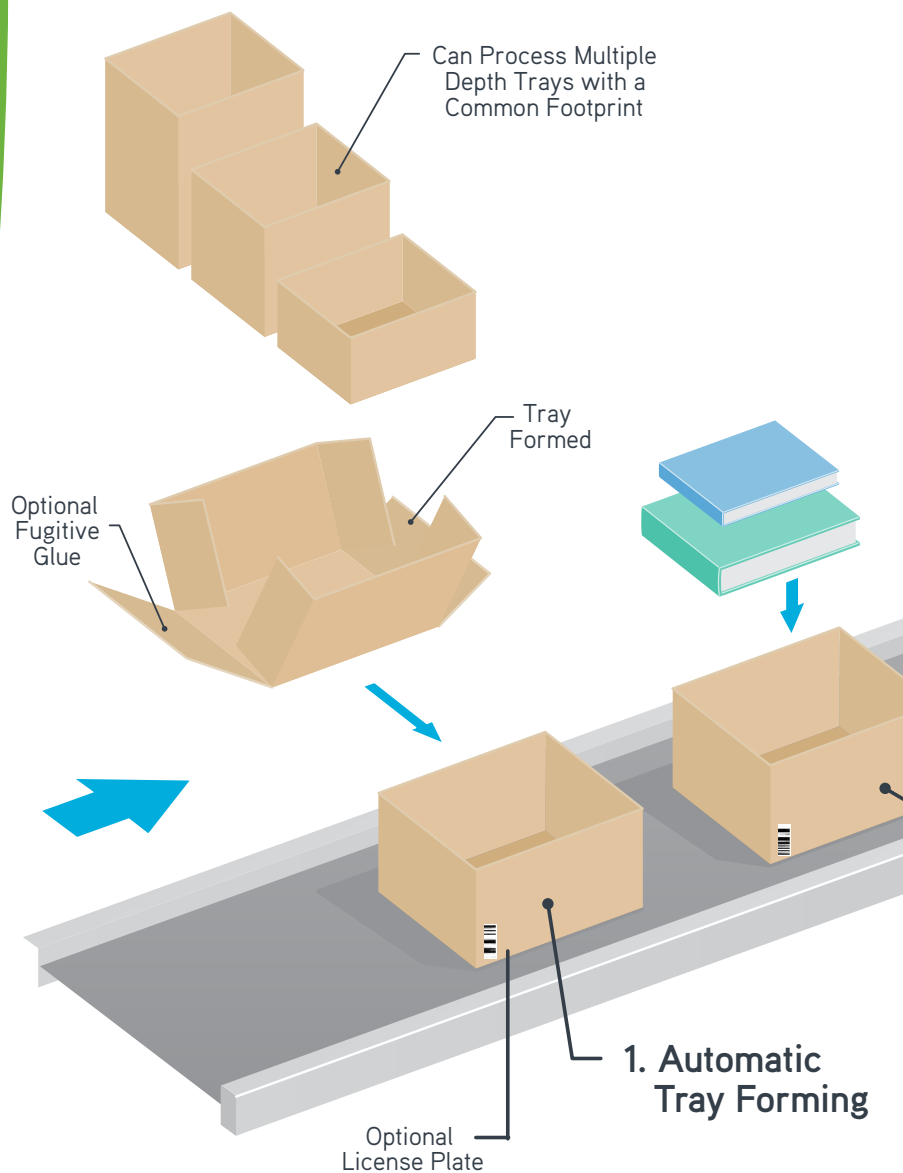

Sealed Air Complete End of The Line Solutions

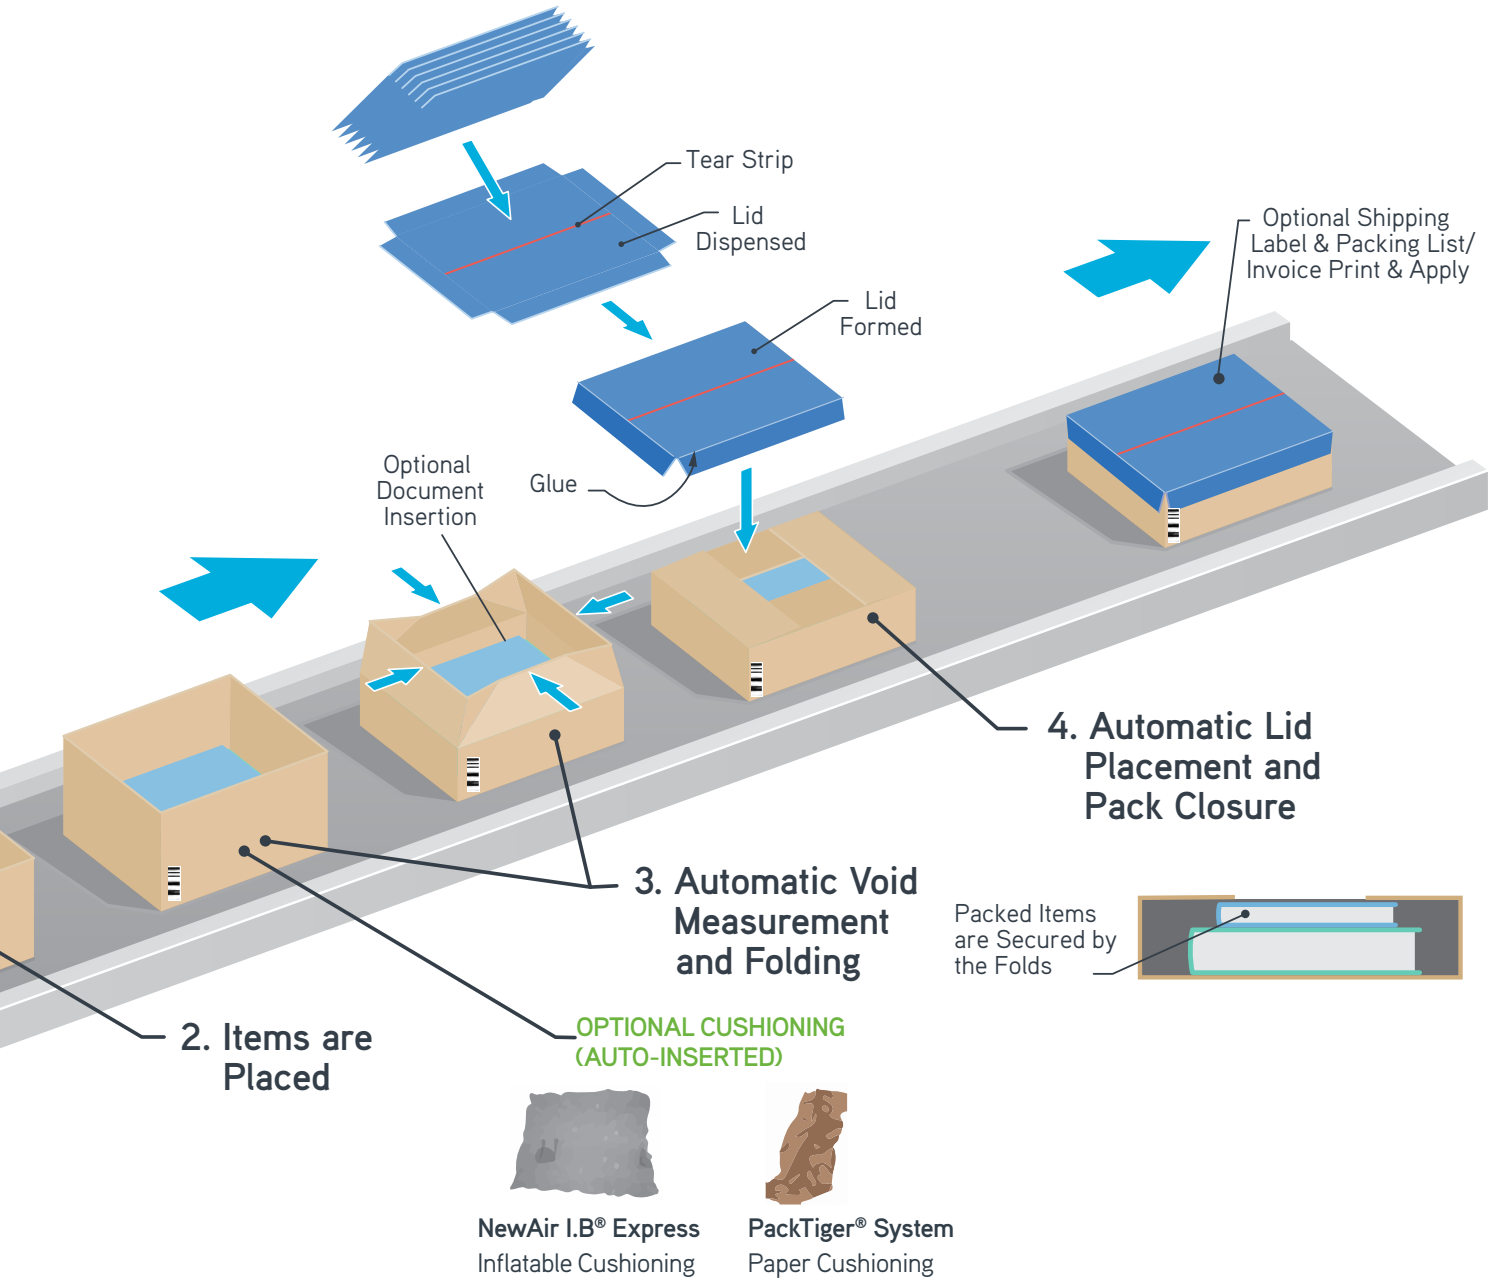

I-Pack™ System Protects

CREATE AN UNRIVALED CUSTOMER EXPERIENCE

Sealed Air's dedicated team of packaging professionals will work with you to design the custom I-Pack™ system solution that will meet the needs of your customers, and your packaging operation, adding value long after the carton is sealed.

SUSTAINABLE SOLUTION

- The 100% corrugated package is "curb-side" recyclable.
- Sustainable / Reduces Carbon Footprint.

TAMPER EVIDENT

- The glued package is securely sealed.

EASY TO OPEN

- The built-in tear strip makes opening an easy pull.

EASY TO RETURN

- For returns, tape can be applied over tear strip area.

I-Pack™

Automated Packaging Solution


Automated Void Reduction System

PAKFORMANCE™ REMOTE REPAIR

The PakFormance™ system allows remote service with Sealed Air's I-Pack™ and Ultipack™ packaging automation systems.

The PakFormance™ system offers a wide range of benefits that include monitoring capabilities for quick detection of problems, process automation for labour savings, product flow control, product tracking and traceability, remote maintenance, and powerful analysis and reporting tools.

TYPICAL APPLICATION*

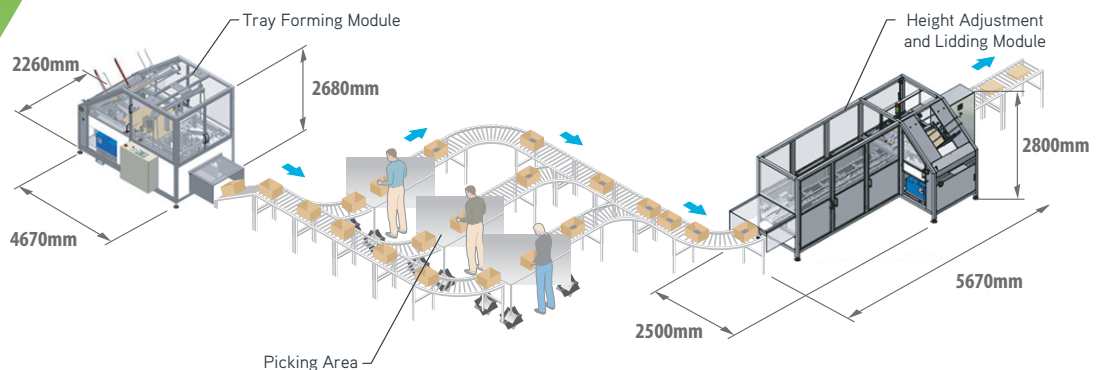

SPECIFICATIONS/REQUIREMENTS

	Throughput	Dimensions (LxWxH)	Weight	Electrical Req.	Air Req.
Tray Forming Module	15-14 trays/min	4670 x 2260 x 2680mm	1302 kg	230 or 460 VAC ~ 3 Phase 7-8 KVA 50/60 Hz	87 psi 4 cfm
Height Adjust. and Lidding Module	12-14trays/min	5670 x 2500 x 2800mm	2495 kg	230 or 460 VAC ~ 3 Phase 10 KVA 50/60 Hz	87 psi 29 cfm
Pack Tiger®	Up to 150 pad/min	870 x 740 x 1500mm	118 kg w/o roll	220-240 VAC, 50/60 Hz, single phase, 7A	n/a
NewAir I.B.® Express	20m/min	770 x 670 x 460mm	37 kg w/o roll	220- 240 VAC, 50/60 HZ, single phase, 2A	n/a

